

Instruction for Use:

To ensure the projection effect on the screen, please note and following points:


- ①-When installing the screen, first find a suitable ground, it is best to lay some clean fabric or other soft materials on it to prevent damage to the screen or the velvet on the frame.
- ②Please do not write on the screen or the frame.
- ③Please do not scratch or scrape the screen with sharp or hard objects to avoid damaging or scratching the surface.
- ④Please do not touch the surface of the screen with your hands.
- ⑤When cleaning the screen surface, do not use corrosive cleaning agents. Instead, use a soft and clean cloth to sweep off the dust and other dirt on the screen. If necessary, you can gently wipe it with a soft and clean cotton cloth or brush.
- ⑥During the installation process, please handle with care. Keep children away from the installation site to prevent injuries or damage to items.

Components:


FRAME	Fiberglass rods	SCREW	Corner plate	Tension spring
FABRIC	Spring hook	HANGER	SCREW	TUBE

Installation Guide:

①Take out 4 side frames and place them as shown in (Picture 1). At the same time, take out 4 corner plates and install them at the ends of 2 shorter side frames respectively.

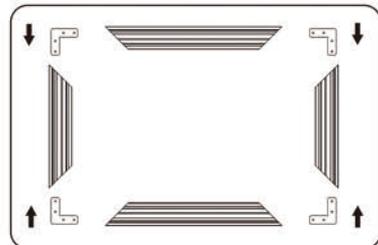


Picture 1

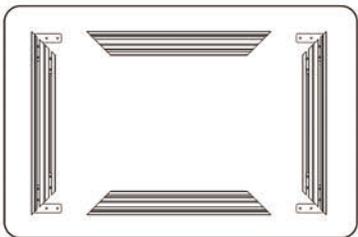


Picture 2

②After the corner plates are installed, connect the short side frames to the long side frames from both ends through the corner plates. Note: During the connection process, both ends of each short side frame should be connected simultaneously. The gaps at the four corners of the frames will be the smallest after the connection. For example: (Picture 2)

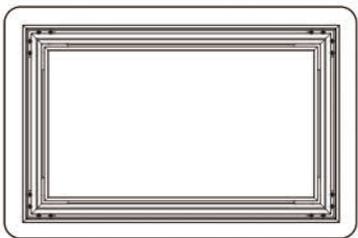


Picture 3

③After all four borders are connected, screw on the corner plates and the assembly of the frame is complete. Note: Screw them in a diagonal sequence and do not allow the connection gaps to widen the screwing process. For example (Picture 3)

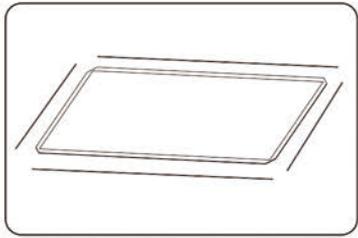

④Open the curtain fabric and place it face down. (If the fabric is soft PVC, fiberglass rods should be inserted into all four sides.) Then place the fabric on the assembled frame, ensuring that the distance between four sides of the fabric and the frame is equal. As shown in (Picture 5)

Picture 4

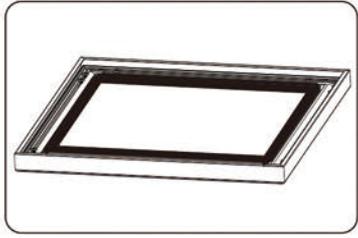

Picture 5

⑤After placing the fabric properly, use the tension springs to hook the fabric and the frame together. It is recommended 2 to 4 tension springs at the middle of each side with spring hooks, then adjust the corners and hook the tension springs one by one, and finally hook the tension springs at other parts. The assembly is complete after all the tension springs are hooked. For example (Picture 6)



Picture 6

